


CONVEYOR ROLLERS

481 / 482 Tube Diameter - 48mm

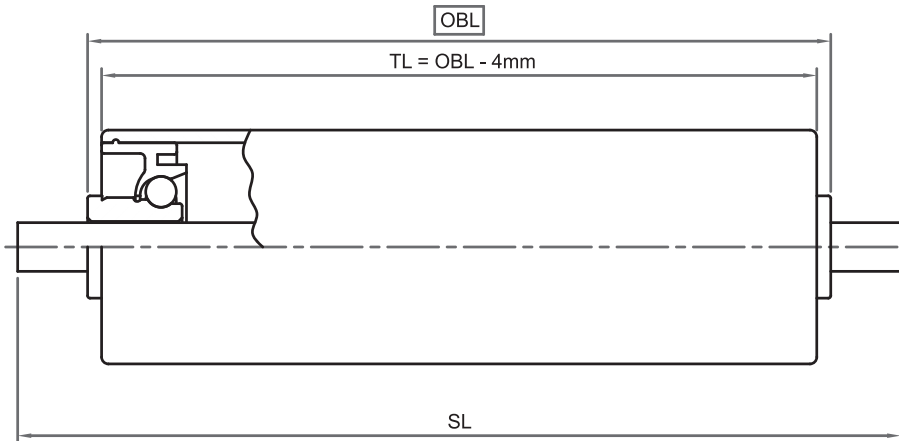

Tube		Bearings		Shaft Materials	
Materials	48.3 x 2.8 Dynopipe 483	Materials	(481) Black acetal race Carbon steel balls	Materials	Aluminium 10 x 8 Q
			(482) White acetal race S/S balls		Mild steel Ø10mm
			Options	Size	S/S Ø10mm
					Greased (G) recommend for powered
			Sealed (SE) (TL = OBL - 5.5)	Type	Ø12mm M/S or S/S
					Standard - SP
					Options - DL, F, L, MT, Ali Q - M/S or S/S -DL, F, FL, FT, L, MT, Ali Q

- Load Rating kg (Minimum applies).

Roller Length (mm)	Tube Material		Shaft	
	Dynopipe	Aluminium Q	Ø10mm	Ø12mm
100	30	30	30	30
200	30	30	30	30
300	30	25	30	30
400	28	20	30	30
500	16	16	30	30
600	12	10	30	30
700	5		30	30
800	3		25	30
900	2		20	30
1000	1		10	30
1100				30
1200				30

* Shaded sizes not recommended

- Max. speed 20m/min.
- Max. static load 18kg.

Common uses;

- Gravity rollers
- Light belt supports.
- Line shaft driven roller.
- General and food grade requirements.