


487 Tube Diameter - 48.3mm

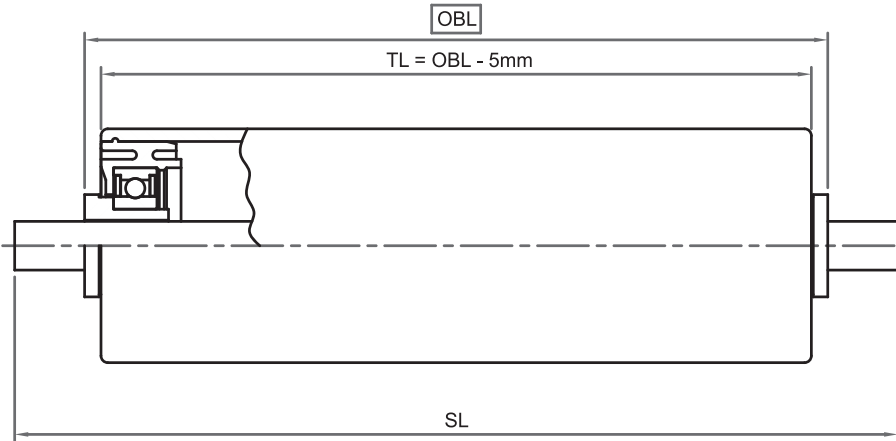

Tube		Bearings		Shaft Materials	
Materials	48.3 x 2.8 Dynopipe 483	Materials	Precision bearing	Materials	Aluminium 10 x 8 Q
			White acetal housing		Mild steel Ø10mm
Options			Stainless steel (SS)	Size	Ø11mm M/S or S/S
			Extra seal (SE) (TL = OBL - 11)		Ø12mm M/S or S/S
					Standard - SP
					Options - Ali Q - DL, F, L - M/S or S/S -DL, F, FL, FT, L, MT

- Load Rating kg (Minimum applies).

Roller Length (mm)	Tube Material	Shaft		
	Dynopipe	Aluminium Q	Ø10mm	Ø12mm
100	40	30	40	40
200	30	30	40	40
300	30	25	40	40
400	28	20	40	40
500	16	16	40	40
600	12	10	40	40
700	5		30	40
800	3		25	40
900	2		20	40
1000	1		10	40
1100				40
1200				40

\* Shaded sizes not recommended

- Max. speed 60m/min.
- Max. static load 40kg.

Common uses; High speed gravity rollers.  
High speed powered rollers.  
Clean areas.