


TUFFY — 2/V9/U0/8 LL

Specifications

Belt Construction: Two ply polyester, PVC Blue longitudinal profile top cover 35 Shore A low friction urethane impregnated underside

Colour	Blue
Belt Thickness	2.5mm
Top Cover Thickness	0.9mm
Bottom Cover Thickness	Nil
Belt Weight	2.7kg/m ²
Coefficient of friction (On steel)	0.15
Minimum pulley Diameter	40mm (at ambient temperature)
Minimum back flex Diameter	80mm (at ambient temperature)
Belt Factor	8 N/mm at 1% stretch
Temperature Range	-10 to + 90 Deg C
Food Rating	FDA, 10/2011/EC + amendments
Carcass construction	Rigid
Stock width	2000mm
Manufactured width	2000mm
Recommended Splice	Lap or finger splice
Recommended fastener	UX1 or # 62

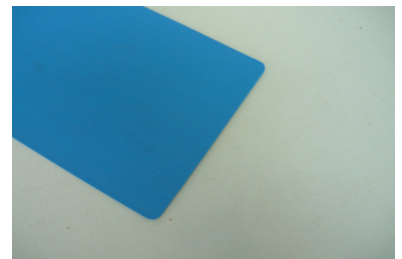

Belt Characteristics

Dimensionally stable and laterally rigid
Suitable for longitudinal or lateral profiles
High adhesion for incline of unit goods
Non marking high friction PVC top cover
Excellent tracking properties, wide belts run perfectly flat
Unaffected by oil, grease, moisture and humidity

Uses

Conveying food stuffs.
Warehouse, distribution centres
Postal and airport baggage handling / X-Ray machines
Laundry and textile transporting
Light duty time transporting
Packaging conveyors / box handling, Cardboard / paper manufacturing